

## **LOW-TEMPERATURE DEEP GROOVE BALL BEARINGS FOR FAST SPEEDS**



**Version:** 10/2024

*Every care has been taken to ensure the correctness of the information contained in this document but no liability can be accepted for any errors or omissions. Subject to change without prior notice.*

## **GMW Ball Bearings for Low Temperature:**

The **suffix LT2 ZZ** -60° bearings are developed based on the structure of a standard bearing but with appropriate treatments of stabilization, radial clearance, grease and ZZ shields that make them suitable for operation from -60° to +110°C. Their application range is extremely wide and covers many areas in particular

The **suffix LT2 ZZ** -60° allows an exceptional range of safety in all applications where they can also occur temporarily and for reasons not dependent on the will of the design, temperatures particularly low

### **Advantages of Bearings for Low Temperatures:**

- Lubricating: Special Grease Low Temperature, maintenance-free required for long periods of time
- Temperature range: Operate from -60°C to +110°C
- Material: Low-temperature bearing is often manufactured with stainless bearing steel 9CR18 and 9CR18MO
- Radial Clearance design C3 or C4
- Low Coefficient of Thermal Expansion
- Non-galling

### **Fields of application:**

- Flash Freezing Lines
- Cryogenic Pumps- Liquid Gases
- Frozen Food Conveyors
- Ice/Dry Ice Machines
- Cold Weather Exposed Equipment


### **Full range of product codes such as:**

- 6000 ... 6022
- 6200 ... 6222
- 6300 ... 6322

There are many types to choose from: No cover (Open), two covers (2Z) and Nitrile rubber seals (NBR)




# 60XX

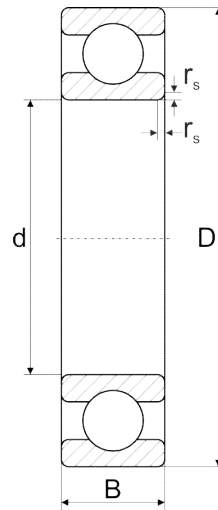

Designation	Bore (B)	Diam (D)	Width (B)	Limiting Speed, RPM	Static Load, kN at -60°C	Static Load, kN at 20°C	Weight (Kgs)
6000 ZZ - LT2	10	26	8	6000	1,57	1,96	20
6001 ZZ - LT2	12	28	8	5800	1,89	2,36	25
6002 ZZ - LT2	15	32	9	5600	2,28	2,85	30
6003 ZZ - LT2	17	35	10	5400	2,60	3,25	40
6004 ZZ - LT2	20	42	12	5200	4,00	5,00	69
6005 ZZ - LT2	25	47	12	4800	4,68	5,85	80
6006 ZZ - LT2	30	55	13	4400	6,40	8,00	120
6007 ZZ - LT2	35	62	14	4000	8,32	10,4	160
6008 ZZ - LT2	40	68	15	3600	9,44	11,8	190
6009 ZZ - LT2	45	75	16	3200	11,44	14,3	250
6010 ZZ - LT2	50	80	16	2800	12,48	15,6	260
6011 ZZ - LT2	55	90	18	2400	16,96	21,2	390
6012 ZZ - LT2	60	95	18	2000	18,56	23,2	420
6013 ZZ - LT2	65	100	18	1800	20,00	25,0	440
6014 ZZ - LT2	70	110	20	1600	25,20	31,5	600
6015 ZZ - LT2	75	115	20	1400	27,20	34,0	640
6016 ZZ - LT2	80	125	22	1200	32,00	40,0	850
6017 ZZ - LT2	85	130	22	1000	34,32	42,9	890
6018 ZZ - LT2	90	140	24	900	39,92	49,9	1150
6019 ZZ - LT2	95	145	24	800	43,16	53,9	1200
6020 ZZ - LT2	100	150	24	700	43,16	53,9	1250

(Remark: The weight applies for the bearing only without lubricant and shields)


# 62XX

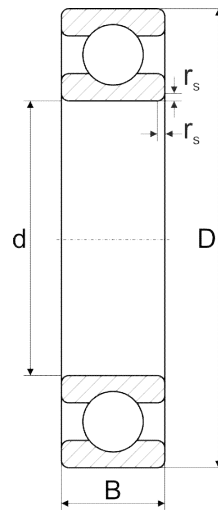

Designation	Bore (B)	Diam (D)	Width (B)	Limiting Speed, RPM	Static Load, kN at -70°C	Static Load, kN at 20°C	Weight (Kgs)
6200 ZZ - LT2	10	30	9	5800	2,08	2,60	30
6201 ZZ - LT2	12	32	10	5600	2,48	3,10	37
6202 ZZ - LT2	15	35	11	5400	3,00	3,75	45
6203 ZZ - LT2	17	40	12	5200	3,80	4,75	65
6204 ZZ - LT2	20	47	14	4800	5,24	6,55	110
6205 ZZ - LT2	25	52	15	4400	6,40	8,00	130
6206 ZZ - LT2	30	62	16	4000	8,96	11,2	200
6207 ZZ - LT2	35	72	17	3600	12,2	15,3	290
6208 ZZ - LT2	40	80	18	3200	14,4	18,0	370
6209 ZZ - LT2	45	85	19	2800	16,3	20,4	410
6210 ZZ - LT2	50	90	20	2400	19,2	24,0	460
6211 ZZ - LT2	55	100	21	2000	23,2	29,0	610
6212 ZZ - LT2	60	110	22	1800	28,8	36,0	780
6213 ZZ - LT2	65	120	23	1600	33,2	41,5	990
6214 ZZ - LT2	70	125	24	1400	35,2	44,0	1040
6215 ZZ - LT2	75	130	25	1200	39,2	49,0	1210
6216 ZZ - LT2	80	140	26	1000	44,0	55,0	1400
6217 ZZ - LT2	85	150	28	900	51,2	64,0	1800
6218 ZZ - LT2	90	160	30	800	58,8	73,5	2150
6219 ZZ - LT2	95	170	32	700	65,2	81,5	2600
6220 ZZ - LT2	100	180	34	600	74,4	93,0	3150

(Remark: The weight applies for the bearing only without lubricant and shields)

# 63XX

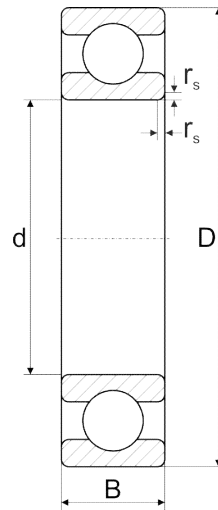

Designation	Bore (B)	Diam (D)	Width (W)	Limiting Speed, RPM	Static Load, kN at -70°C	Static Load, kN at 20°C	Weight (Kgs)
6300 ZZ - LT2	10	35	11	5600	2,48	3,1	52
6301 ZZ - LT2	12	37	12	5400	2,96	3,7	60
6302 ZZ - LT2	15	42	13	5200	3,84	4,8	80
6303 ZZ - LT2	17	47	14	4800	4,64	5,8	120
6304 ZZ - LT2	20	52	15	4400	6,08	7,6	140
6305 ZZ - LT2	25	62	17	4000	8,16	10,2	225
6306 ZZ - LT2	30	72	19	3600	11,68	14,6	350
6307 ZZ - LT2	35	80	21	3200	13,68	17,1	450
6308 ZZ - LT2	40	90	23	2800	18,00	22,5	620
6309 ZZ - LT2	45	100	25	2400	23,04	28,8	830
6310 ZZ - LT2	50	110	27	2000	27,36	34,2	1050
6311 ZZ - LT2	55	120	29	1800	34,16	42,7	1350
6312 ZZ - LT2	60	130	31	1600	37,44	46,8	1700
6313 ZZ - LT2	65	140	33	1400	43,20	54,0	2100
6314 ZZ - LT2	70	150	35	1200	48,96	61,2	2500
6315 ZZ - LT2	75	160	37	1000	55,04	68,8	3000
6316 ZZ - LT2	80	170	39	900	62,24	77,8	3600
6317 ZZ - LT2	85	180	41	800	69,44	86,8	4250
6318 ZZ - LT2	90	190	43	700	77,76	97,2	4900
6319 ZZ - LT2	95	200	45	600	84,96	106,2	5650
6320 ZZ - LT2	100	215	47	500	100,8	126,0	7000

(Remark: The weight applies for the bearing only without lubricant and shields)